

Xpressives Series 2-Foot Linear Fluorescent (T5, T5HO and T8)



- Ideal for sign lighting, exterior building illumination, accenting, indoor commercial illumination, retail, restaurant/food, entertainment industry and any location requiring architectural luminaires.
- Housing is constructed of an anodized aluminum extrusion with precision die-cast, aluminum end caps. Adjustable using a 360° rotatable die cast aluminum mounting assembly.
- Standard fixtures supplied with one ballast.
- Corrosion-resistant Duraplex II polyester powder-coated finish with optional designer finishes available.
- Electronic high-frequency ballast with voltage sensing capability in T5, T8 and T5HO lamping. Twist-lock sockets with Integral ballast for T5, T8 and T5HO.
- Lamping arrangements include 1 or 2 lamps on T5, T8 and T5HO.
- Optics include a highly specular, medium hammertone reflector.
- Clear acrylic lens available with "E" option.
- CSA listed for dry locations standard.
- CSA listed for wet locations when used with E option.

ORDERING INFORMATION

Catalog Number: Example: X1AGR254S2YGWU1E

Series		Shape	Reflector	COLOR 1		Lamp # (cross section)	Lamp Wattage	Ballast	COLOR 2		Color Combination	Voltage	Options
Texture	Color	Texture	Color	Texture	Color			Texture	Color				
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
X= Xpressives Linear Fluorescent	1	A= Asymmetric	W= Wrinkle	G= Green B= Black W= White P= Bronze	1 2 (T5/T8/ T5HO)	17= 2'T8	T8 K1Y K2Y	W= Wrinkle	G= Green B= Black W= White P= Bronze	Q= Combo HEBC T= Combo H-EBC U= Combo HE-BC V= Combo HEB-C W= Combo HB-EC X= Combo HBC-E Y= Combo HC-EB Z= Combo HEC-B	1= 120V 7= 277V B= 120-277 5= 480V	E= Enclosed R= Remote ballast* M= Emergency (remote only) Dimming (consult factory)	
			F= Flat	B= Black P= Bronze		24= 2' T5HO	T5HO S1Y S2Y	F= Flat	B= Black P= Bronze				
			G= High Gloss	G= Green B= Black W= White Y= Yellow U= Blue R= Red		14= 2' T5	T5 N1Y N2Y	G= High Gloss	G= Green B= Black W= White Y= Yellow U= Blue R= Red				
			M= Metallic	C= Copper S= Silver G= Galvanite				M= Metallic	C= Copper S= Silver G= Galvanite				
			T= Textured	S= Silver				T= Textured	S= Silver				
			N= Natural*	U= Unfinished C= Clear Coat				N= Natural*	U= Unfinished C= Clear Coat				

Notes:

- Standard fixtures supplied with one ballast
- Consult factory for multiple ballast options



Listed for dry locations
Listed for wet locations with "E" option

* Consult factory for remote ballast numbers


XPressives 2-Foot Linear Fluorescent

BALLAST MATRIX



K1Y – T8 single-lamp ballast **N1Y** – T5 single-lamp ballast
K2Y – T8 two-lamp ballast **N2Y** – T5 two-lamp ballast

S1Y – T5HO single-lamp ballast **B1Y** – T12HO single-lamp ballast
S2Y – T5HO two-lamp ballast


DIMENSIONAL DATA

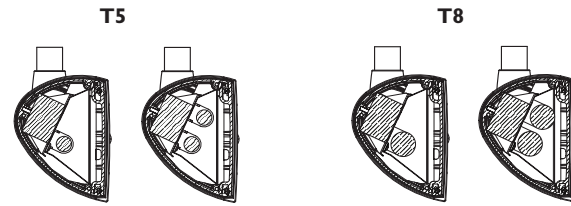

PHOTOMETRIC DATA

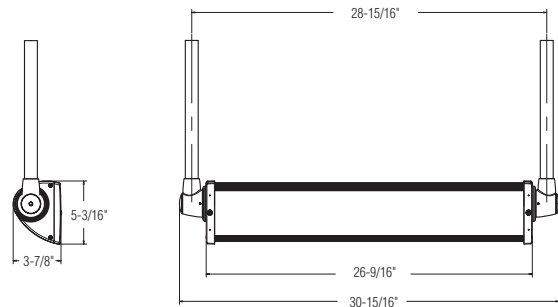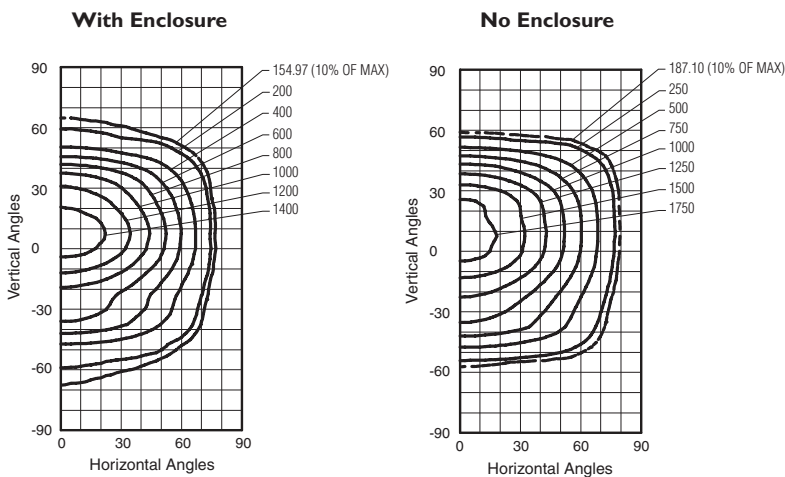

ARM STYLES

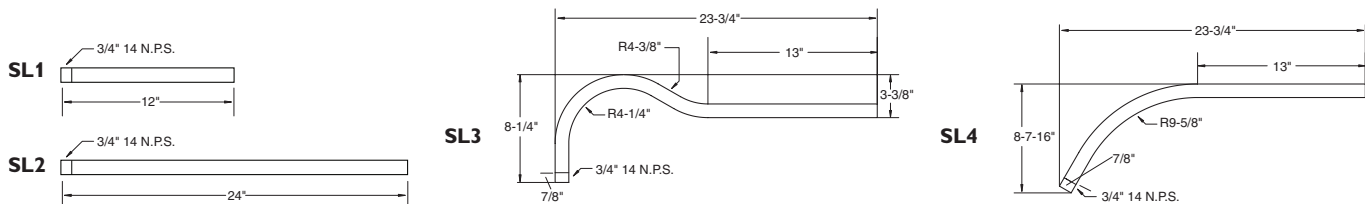

Note: Arm styles SL2, SL3 and SL4 require aircraft cable support (included)

MOUNTING COMPONENTS



MOUNTING ACCESSORY

